



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R8W

SEC 33 | SEC 34  
SEC 4 | SEC 3

T4S  
U.S.B.&M.


Z-13



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 25°01'37" E	32.17'
L2	S 41°49'18" E	13.93'
L3	S 19°48'29" E	32.23'
L4	S 77°29'48" W	29.85'

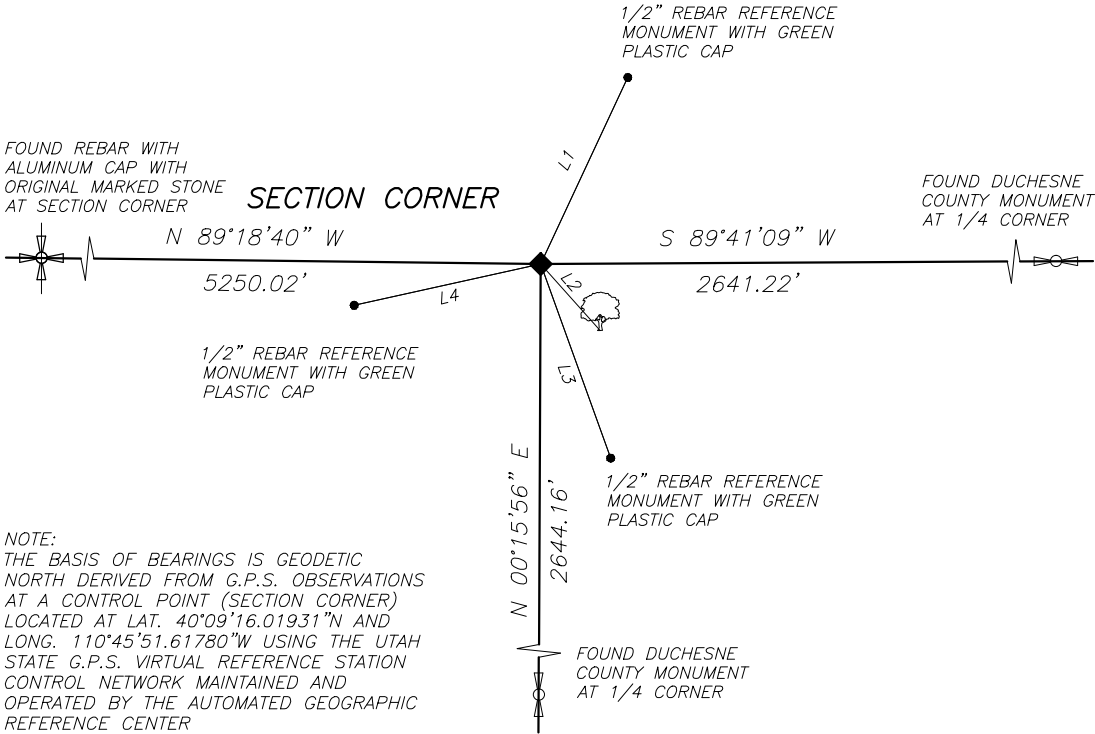

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL STONE LAYING ON GROUND NEAR CORNER. ALSO FOUND ONE BEARING TREE. RESET CORNER USING G.L.O. DATA OF TIE TO BEARING TREE.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8" X 24" REBAR WITH DUCHESNE COUNTY 2 1/2" DIA. ALUMINUM CAP AT POSITION OF CORNER FROM THE TIE TO THE BEARING TREE USING THE G.L.O.



MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7231032.694  
E: 1840735.254  
NAVD88 EL: 7102.91'

LATITUDE: 40°10'07.87296" N  
LONGITUDE: 110°46'59.36176" W  
ELLIPSOID HEIGHT: 7049.65'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300040S0080W0\_400700



PHOTO OF MONUMENT FACING WEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 17 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

